




# E40


## 2.00mm Pitch Pin Header Dual Row Single Body Straight & Right Angle DIP TYPE

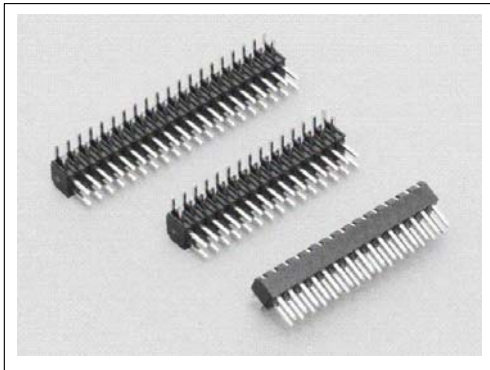

### Specification:

Insulator Material:	High Temperature Thermoplastic, UL94V-0.
Contact Material:	Copper Alloy, 0.50x0.50mm.
Contact Plating:	Au or Sn over Nickel.
Current Rating:	1 AMP.
Insulator Resistance:	500 Megohms Min.
Dielectric Withstanding:	500V AC for 1 Minute.
Operating Temperature:	-40°C ~ +105°C.
Max. Processing Temp.:	230°C for 30~60 seconds. 260°C for 10 seconds.

RoHS Compliant

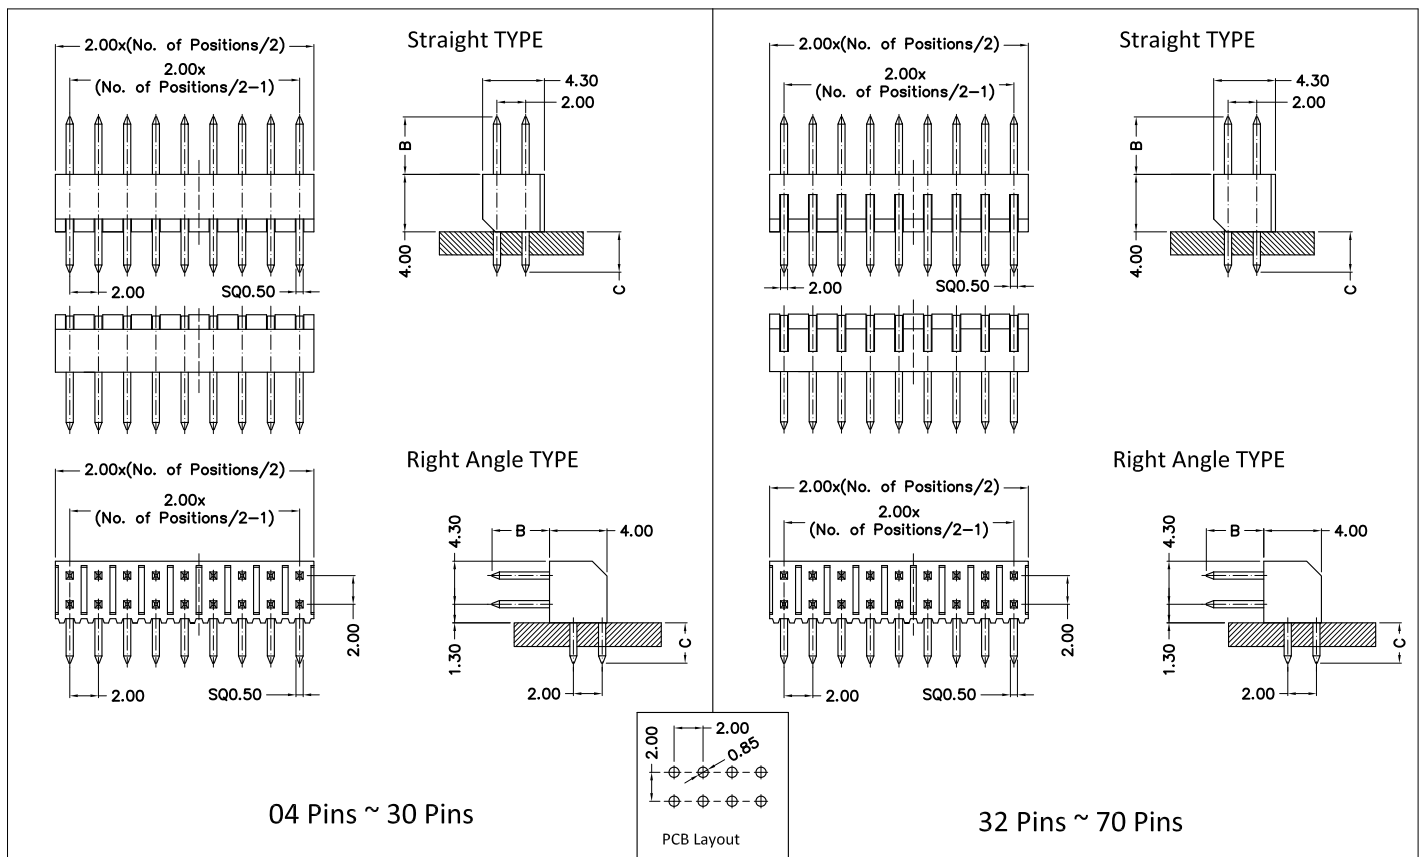

### Ordering Information: E40 - XXX - XX - XX - XXX

1      2      3      4      5

1 --> Series Number:	E40			
2 --> Contact Positions:	4-70 Pin: 004-070,			
3 --> Connector Type:	11: Straight Type,		12: Right Angle Type,	
4 --> Dimensions option:	10: B=4.00, C=2.80,	As request: B/C=XX/XX,	For Eg: B=5.00, C=3.00,	Code=5.00/3.00,
5--> Plating option:	100: Full Gold Flash Plated,		500: Tin Plated,	
	610: 10U" selective Gold plated,		615: 15U" selective Gold plated	
	620: 20U" selective Gold plated,		630: 30U" selective Gold plated	