




E58


2.54mm Pitch Box Header Dual Row Dual Body Straight DIP TYPE & Vertical SMT TYPE

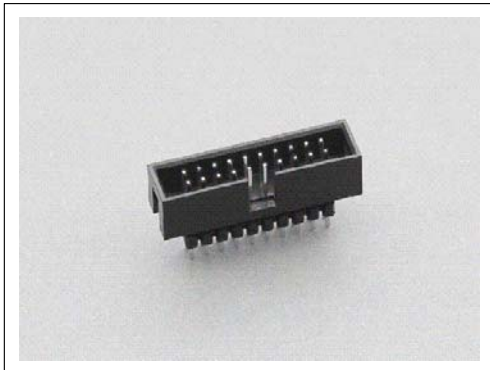

Specification:

Insulator Material:	High Temperature Thermoplastic, UL94V-0.
Contact Material:	Copper Alloy, 0.635x0.635mm.
Contact Plating:	Au or Sn over Nickel.
Current Rating:	3 AMP.
Insulator Resistance:	5000 Megohms Min.
Dielectric Withstanding:	500V AC for 1 Minute.
Operating Temperature:	-55°C ~ +105°C.
Max. Processing Temp.:	230°C for 30~60 seconds. 260°C for 10 seconds.

RoHS Compliant

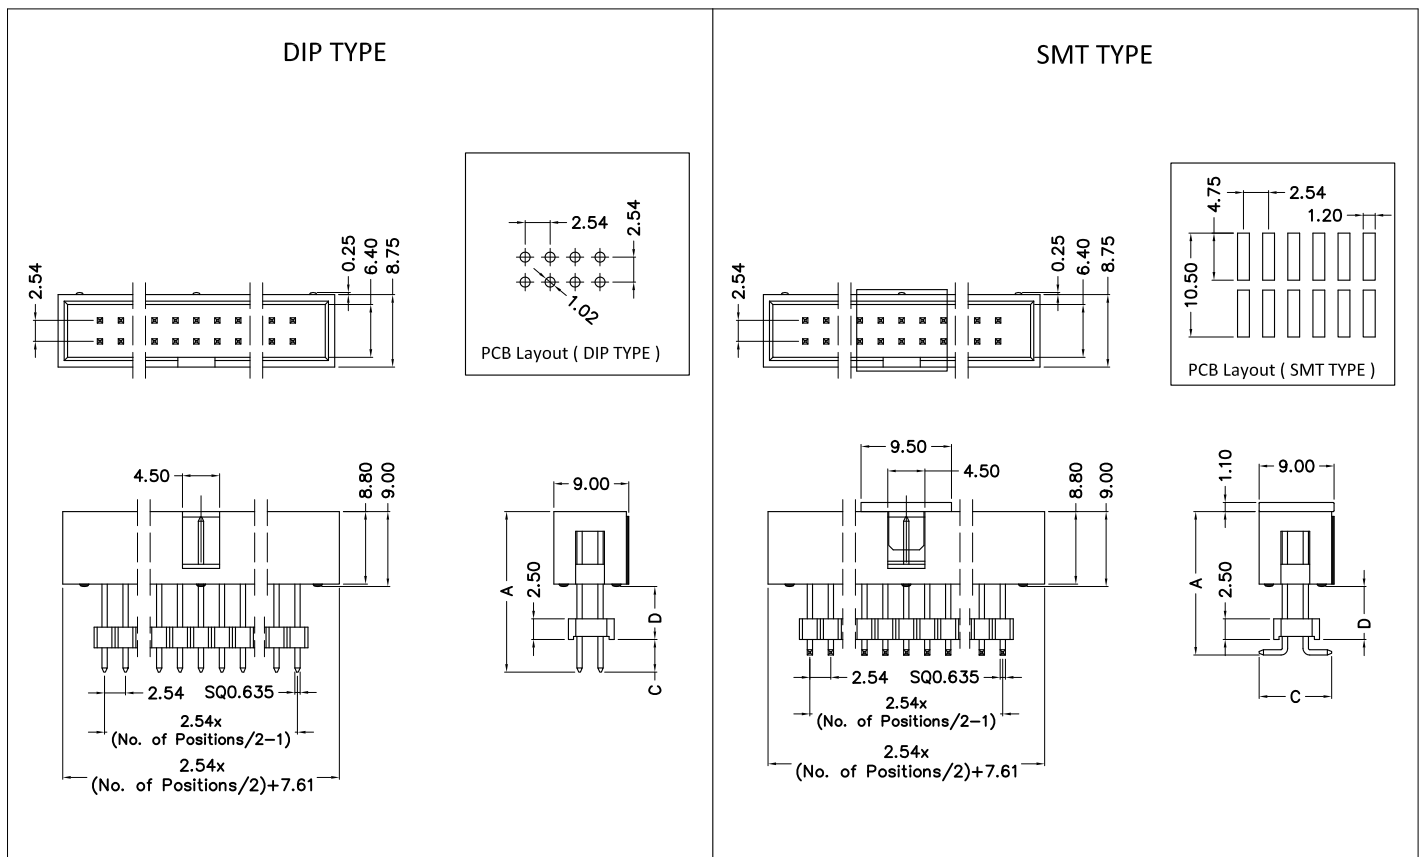

Ordering Information: E58 - XXX - XX - XX - XXX - XX - X

1 2 3 4 5 6 7

1 --> Series Number:	E58					
2 --> Contact Positions:	6~64Pin: 006~064,					
3 --> Connector Type:	10: DIP TYPE, 20: SMT TYPE,					
4 --> Dimension option:	For DIP Type: 10: A=19.80, C=3.30, D=7.50, 11: A=21.60, C=3.30, D=9.20, For SMT Type: 20: A=19.80, C=9.00, D=7.50, 21: A=21.60, C=9.00, D=9.20, As request: A/C/D=XX/XX/XX, For Eg: A=33.60, C=10.00, D=21.20, Code=33.60/10.00/21.20,					
5 --> Plating option:	100: Full Gold Flash Plated, 500: Tin Plated, 600: Selective Gold Flash Plated 610: 10U" selective Gold plated, 615: 15U" selective Gold plated 620: 20U" selective Gold plated, 630: 30U" selective Gold plated					
6 --> CAP option: (For SMT Type only)	00: Without CAP, 01: With CAP,					
7 --> Packing option:	1: DIP Type for Tray,		2: SMT Type for Tube,		3: SMT Type for T & R,	