




# F29


## 2.54mm Pitch Female Header Single & Dual Row Straight & Right Angle DIP TYPE ( Profile option )

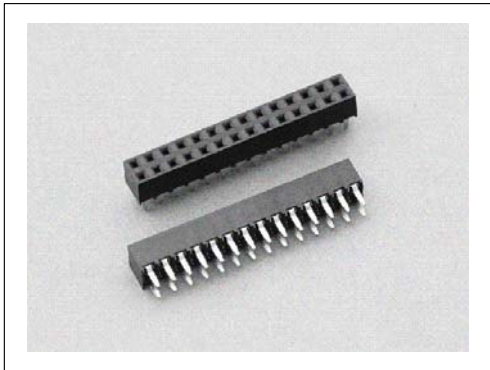

### Specification:

Insulator Material:	High Temperature Thermoplastic, UL94V-0.
Contact Material:	Copper Alloy.
Contact Plating:	Au or Sn over Nickel.
Current Rating:	3 AMP.
Contact Resistance:	20 Milliohms Max.
Insulator Resistance:	1000 Megohms Min.
Dielectric Withstanding:	500V AC for 1 Minute.
Operating Temperature:	-40°C ~ +105°C.
Max. Processing Temp.:	230°C for 30~60 seconds. 260°C for 10 seconds.

RoHS Compliant

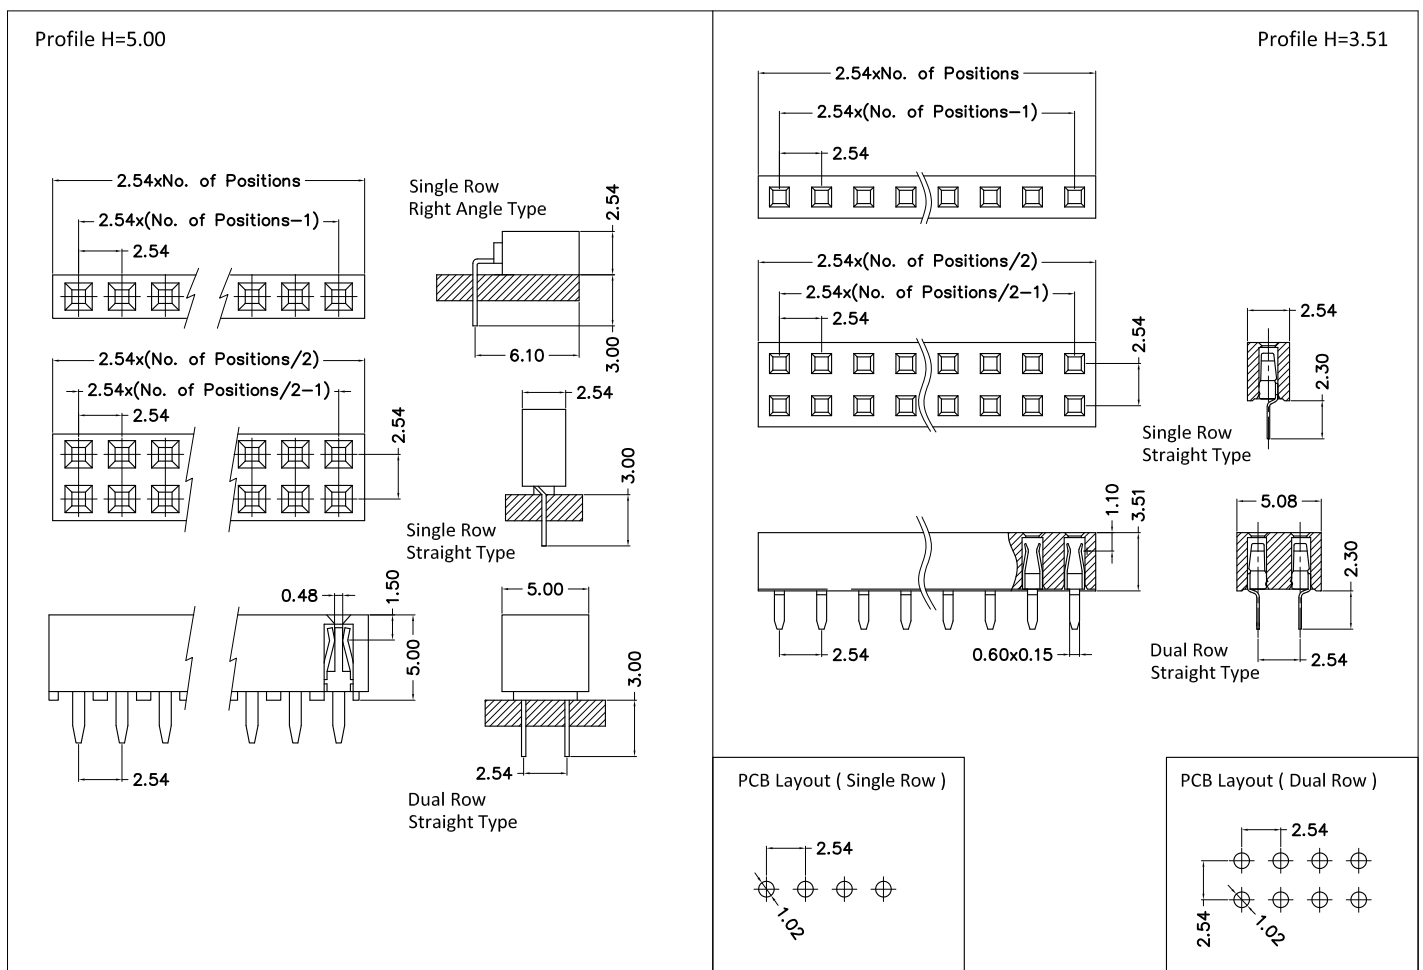

### Ordering Information: F29 - XXX - XX - XXX

1      2      3      4

1 --> Series Number:	F29	
2 --> Contact Positions:	Single Row: 003~040,	Dual Row: 004~080,
3 --> Connector Type:	10: H=5.00 Single Row Straight Type, 20: H=5.00 Dual Row Straight Type,	10: H=5.00 Single Row Right Angle Type,    12: H=3.51 Single Row Straight Type, 21: H=3.51 Dual Row Straight Type,
4--> Plating option:	100: Full Gold Flash Plated, 610: 10U" selective Gold plated, 620: 20U" selective Gold plated,	500: Tin Plated,                      600: Selective Gold Flash Plated 615: 15U" selective Gold plated 630: 30U" selective Gold plated