




F35


2.54mm Pitch Female Header Single & Dual Row Straight DIP TYPE (H=7.10 & 8.50 & 8.40mm)

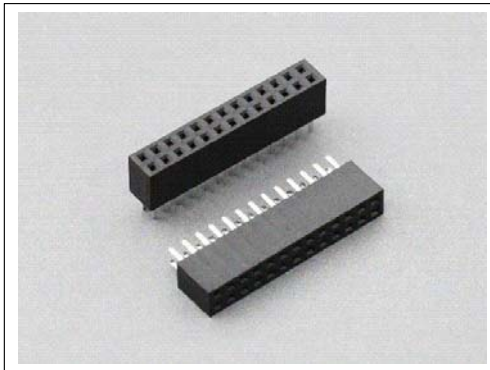

Specification:

| | |
|--------------------------|---|
| Insulator Material: | High Temperature Thermoplastic, UL94V-0. |
| Contact Material: | Copper Alloy. |
| Contact Plating: | Au or Sn over Nickel. |
| Current Rating: | 3 AMP. |
| Contact Resistance: | 20 Milliohms Max. |
| Insulator Resistance: | 1000 Megohms Min. |
| Dielectric Withstanding: | 500V AC for 1 Minute. |
| Operating Temperature: | -40°C ~ +105°C. |
| Max. Processing Temp.: | 230°C for 30~60 seconds. 260°C for 10 seconds. |

RoHS Compliant

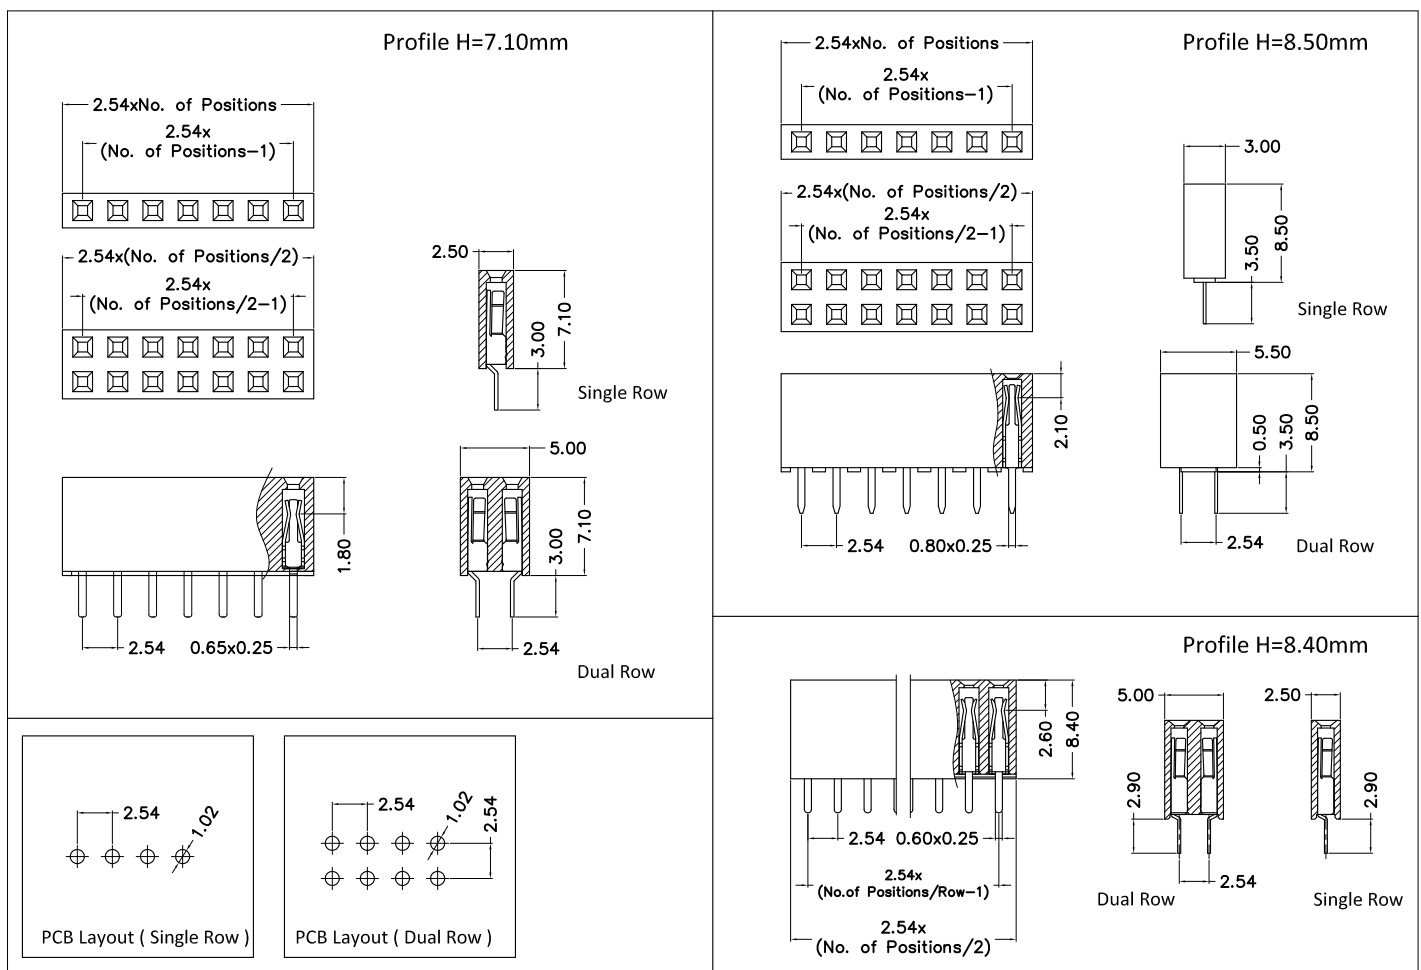

Ordering Information: F35 - XXX - XX - XXX

1 2 3 4

| | | | |
|--------------------------|--|-------------------------------------|----------------------------------|
| 1 --> Series Number: | F35 | | |
| 2 --> Contact Positions: | Single Row: 003~040, Dual Row: 006~080, | | |
| 3 --> Connector Type: | 10: Profile H=7.10mm Single Row Type, | 20: Profile H=7.10mm Dual Row Type, | |
| | 11: Profile H=8.50mm Single Row Type, | 21: Profile H=8.50mm Dual Row Type, | |
| | 12: Profile H=8.40mm Single Row Type, | 22: Profile H=8.40mm Dual Row Type, | |
| 4--> Plating option: | 100: Full Gold Flash Plated, | 500: Tin Plated, | 600: Selective Gold Flash Plated |
| | 610: 10U" selective Gold plated, | 615: 15U" selective Gold plated | |
| | 620: 20U" selective Gold plated, | 630: 30U" selective Gold plated | |